

CULTIVATOR

SPRING LOADED














SALIENT FEATURES


- Robust frame
- Heavy duty forged tyne
- Heavy duty springs to absorb sudden impact
- Superior powder coated paint

CULTIVATOR SPRING LOADED

Cultivators stir and separates the soil, either before planting (to aerate the soil and prepare a smooth, loose seedbed) or after the crop has begun growing (to kill weeds—controlled disturbance of the topsoil).

TECHNICAL SPECIFICATIONS

	 Model Name	 Frame (mm)	 Tyne (mm)	 Linkage 3 Points (mm)	 Shovel (mm)	 Length (mm)	 Spring	 Width (mm)	 Height (mm)	 Weight (Kg. approx)	 Tractor Power (HP)
Cultivator Spring Loaded	SL-CLM9	50x50 (Channel)	25x19 (Forged)	50x12 (Rear)	8(EN-45)	2134	9.2 WD/ 48 OD/ 27 COIL	698	533	180	45+
	SL-CLM11			50x12 (Rear) 65x16 (Front)							

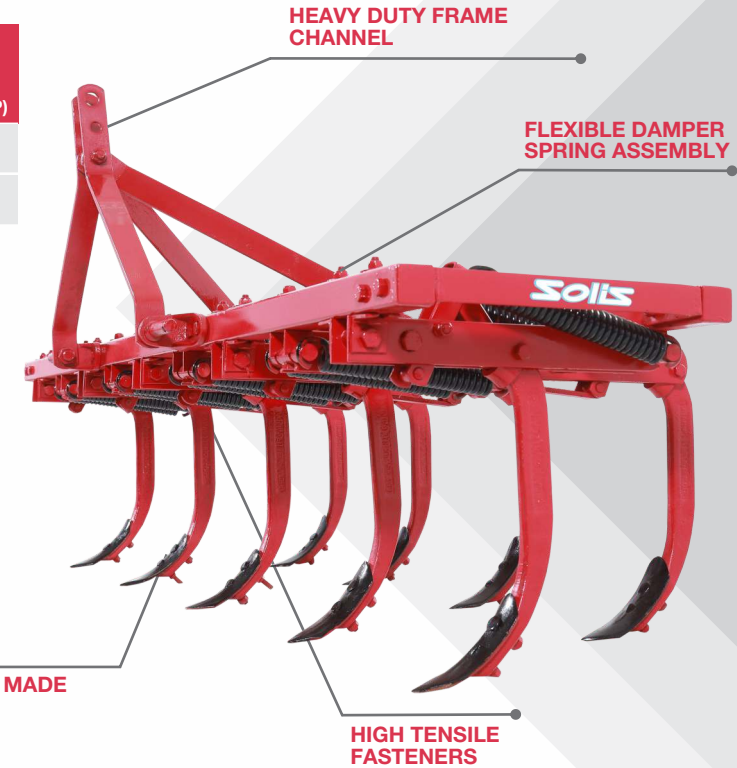

HEAVY DUTY SPRING FOR TOUGH OPERATIONS



TYNES DESIGNED FOR TOUGH OPERATIONS MADE FROM BORON STEEL



INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) | Phone: +91 11 66 45 5200
 Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 | Fax:+91- 01882-522222
 Email: info@solis.com | URL: www.solisnepal.com

Auth. Dealer