

MB PLOUGH



SALIENT FEATURES

- The plough is made from boron steel body
- Height adjustable drawbar
- Adjustment for working depth
- Reliable turnover mechanism
- Overload safety protection

MB PLOUGH

MB Plough is used for initial soil preparation for sowing seed or planting. Generally used for deep tillage of land, to help turn over the upper layer of the soil, bringing fresh nutrients to the surface, while burying weeds and remains of previous crop. It also aerates the soil, allows it to hold moisture better and is tough to withstand heavy loads.

TECHNICAL SPECIFICATIONS

Series	Model Name	Frame (mm)	No. of Furrow	Draw Bar Rod (mm)	Tines (mm)	Width Of Cut (mm)	Bar Point	Blade (mm)	Weight (Kg. approx)	Tractor Power (HP)
Heavy Duty Series	SL-MP02	80x80x5 (Sq. Tubular Frame)	2	50 (Solid Rod)	36 (Profile Cut Single Piece)	600	32 (Sq. Bar)	10	290	45+
	SL-MP03		3			890			400	50+



ROBUST FRAME




HEAVY DUTY FURROW



LONG LASTING HEAVY DUTY BLADE & BAR POINT



HEAVY DUTY 3 POINT LINKAGE

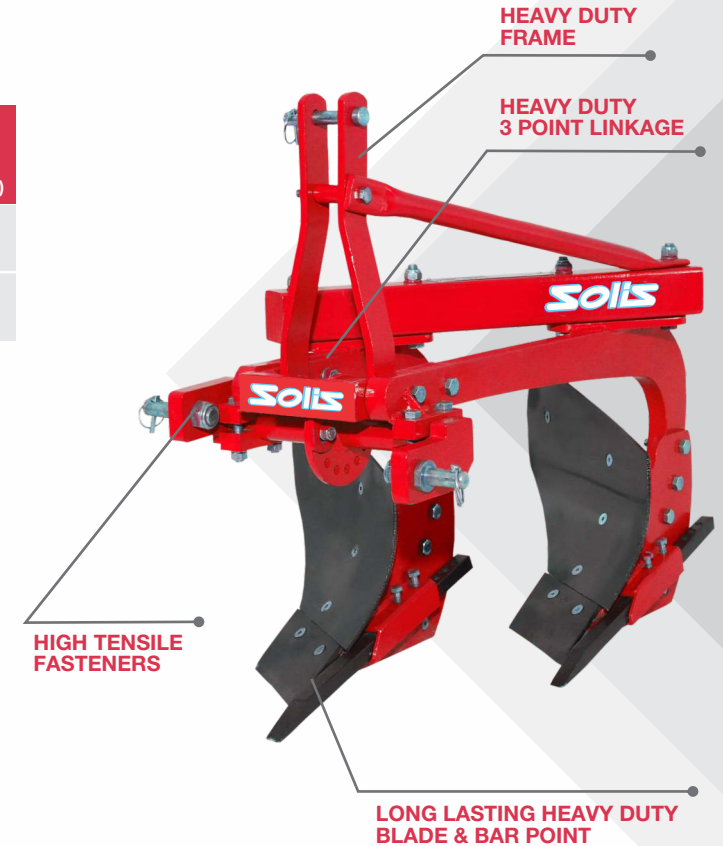

Solis

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) | Phone: +91 11 66 45 5200
 Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 | Fax: +91- 01882-522222
 Email: info@solis.com | URL: www.solisnepal.com

Auth. Dealer