

ROTAVATOR



SALIENT FEATURES


- International quality boron steel blades
- High tensile fasteners
- Flexible spring damper assembly
- Heavy duty gear box
- Powder coated paint
- Ensures smooth operation in different types of soils
- Provides ease of working in interculture operations
- Effective for puddling due to better churning of soil

ROTAVATOR

Rotavator is agricultural implement used for pulverising of soil and make it ready for seeding. It also helps to improve soil health and save fuel, cost, time & energy.

TECHNICAL SPECIFICATIONS

Series	Model Name	Length (mm)	Width (mm)	Height (mm)	Size (In Feet)	Tillage Width (mm)	Gear Box	Side Transmission	Type of Blade	No of Blades	No. of Flange's	Weight (Kg. Approx)	Tractor Power (HP)
Regular Series	SL-RS-175	2050	1010	1110	6'	1750	Single / Multi Speed	Gear Drive	C & L Type	42	8	420	45+
	SL-RS-200	2300			7'	2000				48	9	460	50+
Smart Series	SL-SS165	1831	1010	1078	5.5	1650	Multi Speed	Gear Drive	C & L Type	48	9	400	40-50
	SL-SS185	2031			6	1850				54	10	420	45-55
	SL-SS205	2231			7	2050				60	11	460	50-60
Challenger Series	SL-CS150	1815	1010	1110	5'	1625	Multi Speed	Gear Drive	C & L Type	36	7	420	45-55
	SL-CS175	2067			6'	1880				42	8	450	55-65
	SL-CS200	2319			7'	2130				48	9	484	60-70
	SL-CS225	2525			8'	2335				54	10	536	65-90

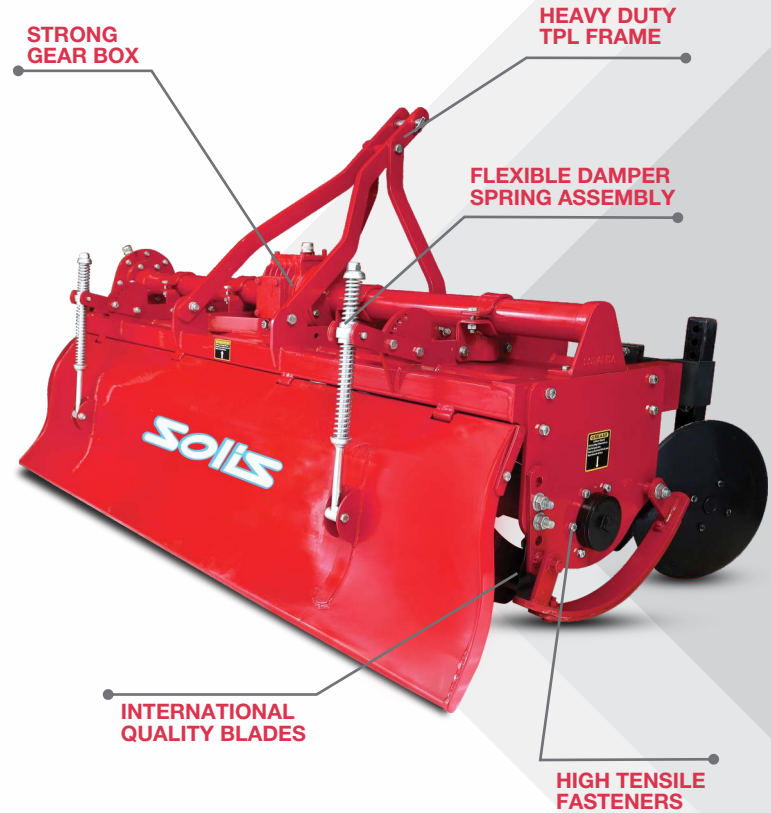

HEAVY DUTY GEARBOX
COMPATIBLE WITH HIGHER HP
TRACTORS UP TO 90HP



**INTERNATIONAL
QUALITY BORON STEEL
ANTI WEAR BLADES**



**FLEXIBLE &
ADJUSTABLE
TRAILER SPRING**



**ROBUST
3 POINT LINKAGE**

Solis

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) | Phone: +91 11 66 45 5200
Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 | Fax:+91- 01882-522222
Email: info@solis.com | URL: www.solisnepal.com

Auth. Dealer